



EWS7952FP-FIT



EnGenius Fit Layer 2 Plus Managed EWS7952FP-FIT 48-Port Gigabit PoE+ Switch with 740W Budget, 4 SFP Uplink Ports

Simple • Secure • Smart



The EnGenius Fit Managed Switch EWS7952FP-FIT is a 48-port Gigabit PoE+ Layer 2 plus switch with a 740W PoE budget and 4 SFP uplink ports.

Manage your network onsite or on-the-go through our **FitXpress** cloud-based mobile app or web portal. Additionally, **FitController** gives you greater control of your network using plug-n-play hardware with embedded network management software. Admins can easily view detailed analytics from a single pane of glass as well as monitor and troubleshoot issues instantly. With its business-class features, the EnGenius Fit managed switch provides secure, reliable, and high-performance switching while reducing capital and operating expenses for cost-conscious small businesses.

Features & Benefits

- 48 10/100/1000 Base-T GbE Ports.
- Full-featured Layer 2 plus switching.
- 802.3af/at PoE ready on all ports with 740W PoE budget.
- 104 Gbps switching capacity.
- Setup in minutes with app-based step by step instructions.
- Quick-scan device register, remote monitoring and troubleshooting.
- Real-time system metrics, analytics and remote configurations.
- Manage your network onsite or on-the-go through our **FitXpress** cloud-based mobile app or web portal.
- **FitController** gives you greater control of your network using plug-n-play hardware with embedded network management software.
- Monitor a site or multiple sites with no recurring cost or licensing fee.
- Security - access control list/port security; 802.1x authentication.
- IGMP & MLD snooping provides advanced multicast filtering & network efficiency.
- 802.3ad Link Aggregation (LACP), Spanning Tree (STP), Rapid Spanning Tree (RSTP) & Multiple Spanning Tree (MSTP).
- Voice VLAN for fast, reliable deployment of VoIP services.
- Advanced QoS with IPv4/IPv6 ingress traffic filtering (ACLs) & prioritization.
- Standards-based technology ensures interoperability with existing standards-based network devices.
- Dual firmware images improve reliability & network uptime.

Technical Specifications

EWS7952FP-FIT

Port Standards

802.3 10Base-T Ethernet

802.3u 100Base-TX Ethernet

802.3ab 1000Base-T Ethernet

802.3x Full-Duplex Flow Control

Network Ports

48 10/100/1000 Mbps Ports

4 10/100/1000 Mbps SFP Ports

Switching Capacity

104Gbps

PoE Capable Ports

1-48 (802.3af/at)

All Gigabit Ethernet ports can output up to 30 Watts

Total PoE Budget

740W

SDRAM

256MB

Flash Memory

32MB

Packet Buffer Memory

1.5MB

Address Database Size

8,000 MAC Addresses

PHYSICAL INTERFACE

LED Indicators

Power LED

Fault LED

PoE Max LED

LAN Mode LED

PoE Mode LED

Ports

Link/Activity/Speed (per Ethernet port)

Link/Activity/Speed (per SFP slot)

SFP Ports

Link/Act LED

Reset Button

SOFTWARE FEATURES

Multiple IP Interface

20 IPv6 address

ARP Table

Max. 192 ARP entries

Static ARP

Static 192 ARP entries

IPv4 Static Route

Max. 59 entries

IPv6 Static Route

Max. 5 entries

SOFTWARE FEATURES (L2 FEATURE)

MAC Address Table

8K

Jumbo Frame

9K

Multicast Group

Max 256 groups

Port Security

Max. 256 Entries

SSL Certificate

Certificate/Key Update

L2 Features

802.1Q VLAN tagging

VLAN Table

Port-based VLAN

Voice VLAN

GARP VLAN Registration Protocol

802.1d Spanning tree:

RSTP

CIST

MSTP

802.3ad Link Aggregation

Loopback Detection

L3 Feature

IGMP Snooping

MLD Snooping

DHCP Snooping

DHCP Relay

Static Route

Port Settings

Multicast Filtering

EEE

Port Isolation

Port Mirror

Jumbo Frames

LLDP

Security

802.1X Radius Authentication Protocol

Access:

Web:

HTTP Service
HTTPs Service

Command Line Interface (CLI):

Telnet Service
SSH Service

Port Security

Radius Server

DoS Prevention

System Settings

IP Settings:

IPv4 Management
IPv6 Management
IPv4 Network

ARP Table

ARP Statistics

Simple Network Time Protocol (SNTP)

Analyze

Log:

Local Logging
Remote Logging

Diagnostic

Cable Diagnostics

Ping Test

IPv6 Ping Test

Trace Route

Connection Diagnostic

Access Control List (ACL)

MAC Based ACL

MAC ACE

IPv4 ACL

IPv4 ACE

IPv6 ACL

IPv6 ACE

ACL (Port) Binding

SNMP

SNMP v1/v2c/v3 Support

RMON

RMON 1,2,3,9

QoS

CoS Mapping

DSCP Mapping

Port CoS

Bandwidth Control

Storm control

Advanced Mode:

Class Mapping

MIB/RFC Standards

RFC1213

RFC1493

RFC1757

RFC2674

RFC2863

ENVIRONMENT & MECHANICAL

Temperature Range

Operating: 32 to 122°F/0 to 50°C

Storage: -40 to 158°F/-40 to 70 °C

Humidity (Non-Condensing)

5% - 95%

DIMENSIONS & WEIGHTS

Device

Weight: 14.15 lbs. (6.41kg)

Width: 17.32" (440 mm)

Length: 12.20" (310 mm)

Height: 1.73" (44 mm)

Packaging

Weight: 17.28 lbs. (7.83 kg)

Width: 21.57" (548 mm)

Length: 16.88" (429 mm)

Height: 4.13" (105 mm)

Package Contents

1x Fit L2+ Managed 48 Ports EWS7952FP-FIT PoE+ Gigabit Switch

1 x Power Cord

1 x RJ45 Console Cable

1 x Rack Mount Kit

Quick Start Guide QR Code

FitXpress Cloud-Based Mobile App QR Code


Certifications

CE, FCC, IC

Warranty

1 Year

Product Images

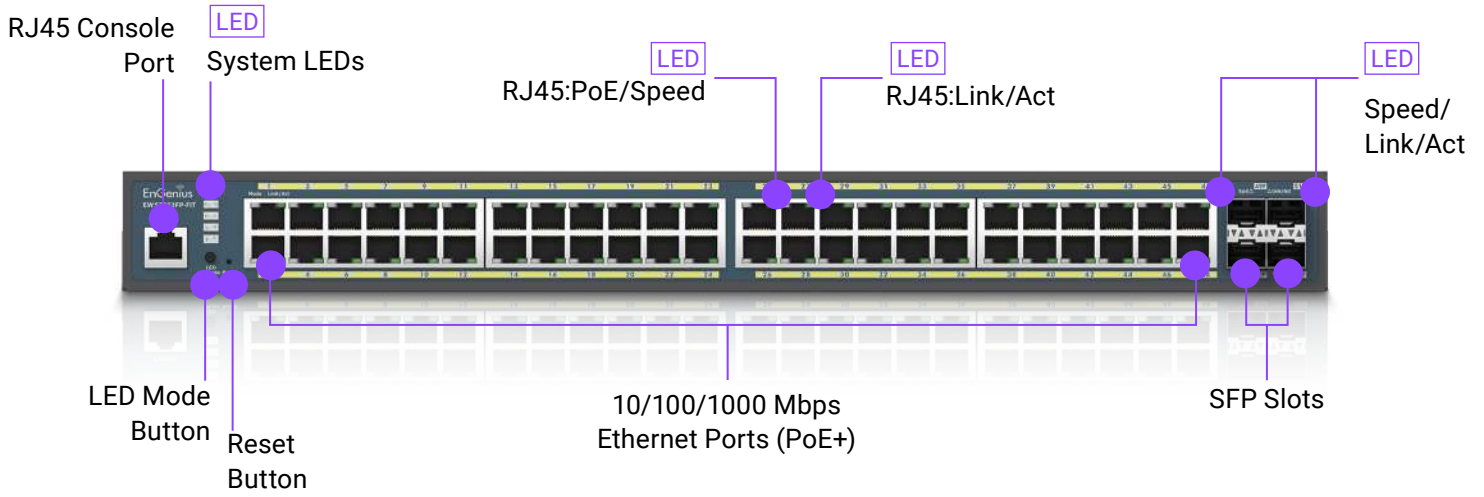

EnGenius Technologies | 1580 Scenic Ave. Costa Mesa, CA 92626

Email: partners@enginustech.com | Website: enginustech.com

Version:10/2022

Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. For United States of America: Copyright ©2022 EnGenius Technologies, Inc. All rights reserved.