

G1116P-16-150W

16-Port Gigabit Desktop/Rackmount Switch
With 16-Port PoE

G1116P-16-150W

16-Port Gigabit Desktop/Rackmount Switch With 16-Port PoE

Products Description

G1116P-16-150W is a IP-COM switch that offers 16 10/100/1000M RJ45 ports. Ports 1-16 comply with the IEEE802.3af standard (maximum PoE power output : 15.4w) and 802.3at standard (maximum PoE power output: 30 W). The switch offers a maximum PoE power output of 135W and can supply power to exchange data with APs, IP cameras, and IP phones through CAT5e cables. It also provides simple management modes such as CCTV, VLAN, and Isolation to help reduce cabling costs of IP terminals : APs and IP cameras.



- 16 10/100/1000Mbps RJ45 ports with 16 port PoE
- Desktop and wall-mount
- Plug and play, Without configuration

Key Feature

- Compliant with IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3ab
- Store & forward, share memory, non-blocking architecture
- Supports MAC address self-learning and auto MDI/MDIX
- Provide 16 10/100/1000Mbps auto-negotiation ports with 16-port PoE
- Ports 1-16: IEEE 802.3af/at PoE ports
- Supports full-duplex 802.3x flow control and half-duplex backpressure flow control
- Supports 8K MAC address list, MAC address learning and auto-ageing
- Supports port Inductive Lightning Protection up to 6KV
- Fanless design
- maximum power output of the switch: 135W
- Hardware DIP switch for selection among the Standard, CCTV, VLAN, and Isolation modes.

Product Features

135W PoE power supply

Ports 1-16 comply with the IEEE802.3af and IEEE802.3at power supply standards. The entire switch offers a maximum PoE power output of 135W, whereas each ports offers a maximum PoE power output of 30W. The ports can be used to supply power to and exchange data with APs and IP cameras.

Excellent Lightning-Proof design

Integrated professional lightning-proof circuit which supports port and power supply lightning-proof (common mode protection 6KV). Effectively reduce the damage to the network system caused by the thundery weather.



4 Network operation modes offered

Hardware DIP switch for selection among the Standard, CCTV, VLAN, and Isolation modes. Hardware DIP switch to isolate ports to prevent broadcast storm and defend against DHCP spoofing .

Easy to use

Plug-and-play, which helps you quickly build Gigabit wired network and greatly simplify the management and maintenance of equipment, supports desktop and rack-mount, easy to install.

Application Scenarios

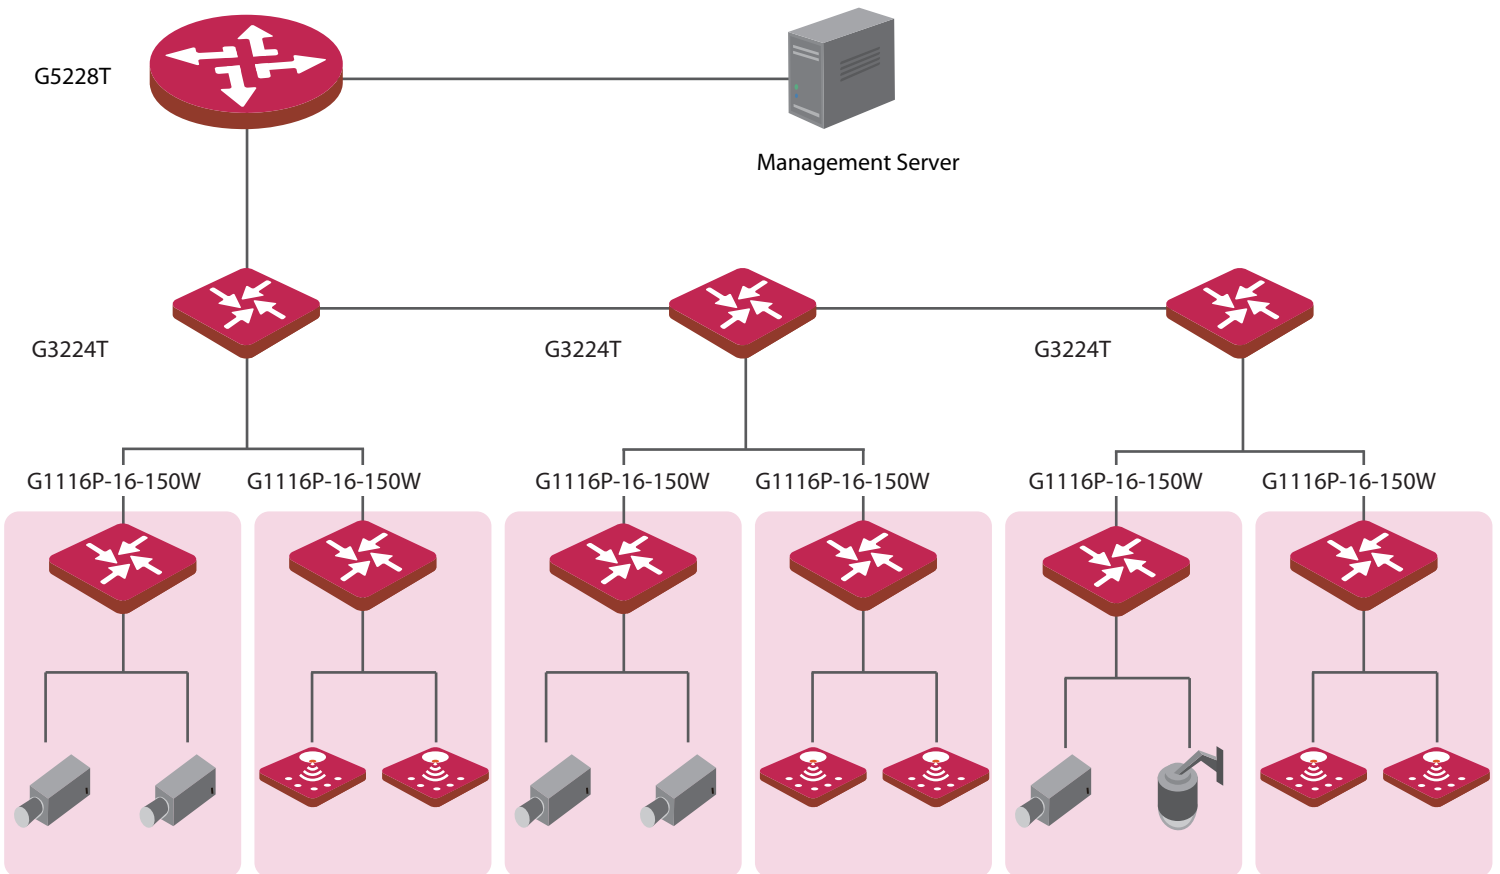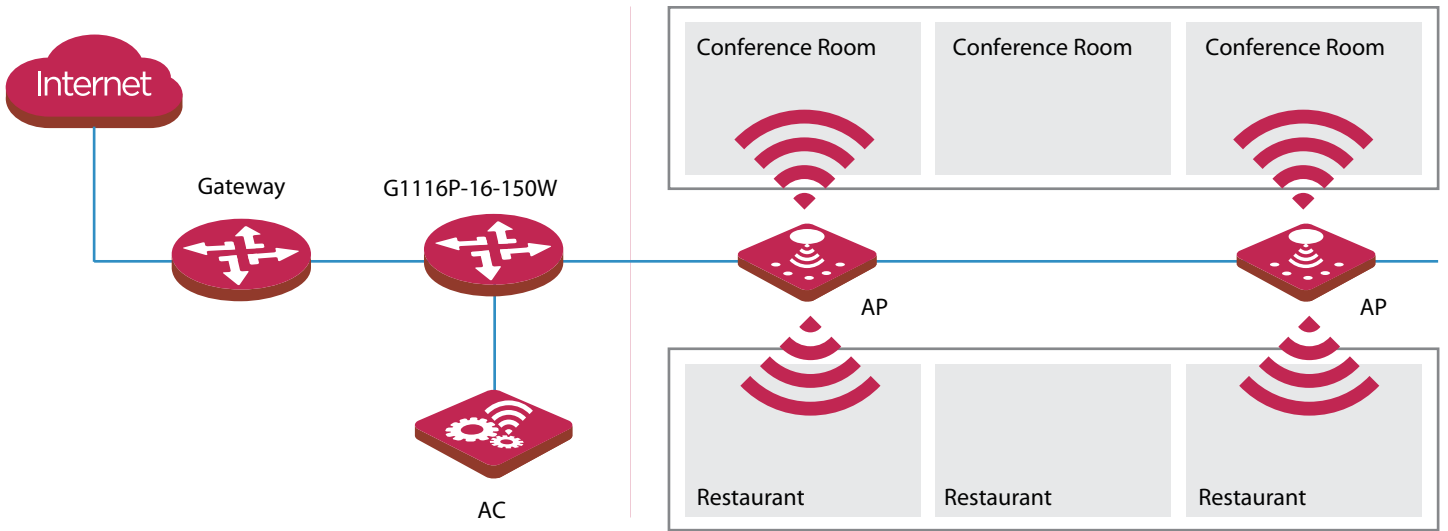

Product Model	G1116P-16-150W v1.0
Hardware Features	
Standard&Protocol	IEEE 802.3/IEEE 802.3u/IEEE 802.3ab/IEEE 802.3x/ IEEE 802.3af/IEEE 802.3at
Indicator	16*Link/Act per device 16*PoE per device 1*Power per device
Interface	16 10/100/1000Base-T ports(Data/Power)
Port Lightning Protection	6KV
Store and forward	Yes
Exchange Capacity	32 Gbps
Packet forwarding rate	23.6Mpps
MAC Address Table	8K
PoE supply management	Port 1-16 support IEEE802.3at/af PoE standard
PoE through pin	1 2 4 5 +;3 6 7 8 -
Voltage input range	AC: 100-240V~50/60Hz
Dimensions (W x D x H)	294*178*44mm
Power Consumption	in full configuration:<150W PoE Max Power Supply:135W
Port Features	Standard: the switch functions as a common unmanaged switch and all the ports of the switch can communicate with each other. CCTV: the port cache is optimized and PoE ports 1-8 have higher priorities over the other ports. All the ports of the switch can communicate with each other. VLAN: ports 1 to 14 are isolated from each other, but can communicate with ports 15 and 16 (uplink ports) respectively. Isolation: ports 1 to 8 and Ports 9 to 16 belong to two different VLAN.This mode can be used to isolate supervision network and wireless network to make them not interfere with each other.
Environment	Operating Temperature: 0°C~40°C (32°F~104°F) Storage Temperature: -40°C~70°C (-40°F~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing

IP-COM
World Wide Wireless

Headquarters

IP-COM Networks Co.,Ltd.

Tel: +86 755-27653089

Fax: +86 755-27657178

Email: marketing@ip-com.com.cn

Website: www.ip-com.com.cn

ADD: Tower E3, No1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China.

