



UniFi Network
U7 Pro Max Datasheet



Mechanical

Dimensions	150 x 103 x 36 mm (5.9 x 4.1 x 1.4")
Weight	580 g (1.3 lb)
Enclosure material	Polycarbonate, aluminum
Mount material	Aluminum

Hardware


Networking interface	(1) 1/2.5 GbE RJ45 port
Management interface	Ethernet
Power method	PoE+
Power supply	UniFi PoE switch
Supported voltage range	44–57V DC
Max. power consumption	22W
Max. TX power	
2.4 GHz	22 dBm
5 GHz	26 dBm
6 GHz	23 dBm
MIMO	
2.4 GHz	2 x 2 (DL/UL MU-MIMO)
5 GHz	2 x 2 (DL/UL MU-MIMO)
6 GHz	2 x 2 (DL/UL MU-MIMO)
Max. data rate	
2.4 GHz	688 Mbps (BW40)
5 GHz	4.3 Gbps (BW240)
6 GHz	5.7 Gbps (BW320)

Antenna gain	
2.4 GHz	4 dBi
5 GHz	5 dBi
6 GHz	6 dBi
LEDs	White/blue
Button	Factory reset
Mounting	Wall (Included) Table stand, flush mount (Optional)
Ambient operating temperature	-30 to 60° C (-22 to 140° F)
Ambient operating humidity	5 to 95% noncondensing
Certifications	CE, FCC, IC
Software	
WiFi standards	802.11a/b/g/n/ac/ax/be (WiFi 6/6E, WiFi 7)
Wireless security	WPA-PSK, WPA-Enterprise (WPA/WPA2/WPA3/PPSK)
BSSID	8 per radio
VLAN	802.1Q
Advanced QoS	Per-user rate limiting
Guest traffic isolation	Supported
Concurrent clients	300+
Supported Data Rates	
802.11a	6, 9, 12, 18, 24, 36, 48, 54 Mbps
802.11b	1, 2, 5.5, 11 Mbps
802.11g	6, 9, 12, 18, 24, 36, 48, 54 Mbps

802.11n	6.5 Mbps to 300 Mbps (MCS0 - MCS15, HT 20/40)
802.11ac	6.5 Mbps to 1.7 Gbps (MCS0 - MCS9 NSS1/2, VHT 20/40/80/160)
802.11ax (WiFi 6/6E)	7.3 Mbps to 2.4 Gbps (MCS0 - MCS11 NSS1/2, HE 20/40/80/160)
802.11be (WiFi 7)	7.3 Mbps to 5.7 Gbps (MCS0 - MCS13 NSS1/2, EHT 20/40/80/160/240/320)

Application Requirements

UniFi Network	Version 8.1 and later
UniFi OS	Version 3.2 and later

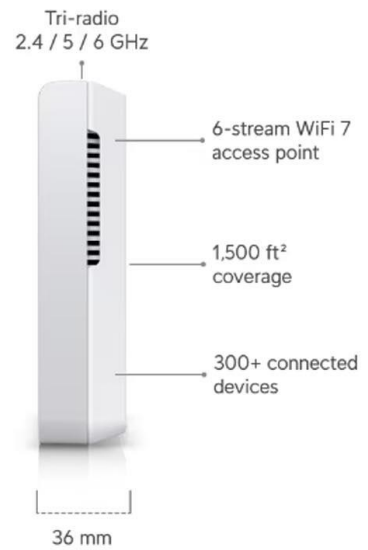

*Sold separately.

If you need further assistance, visit our [Help Center](#) or contact [Ubiquiti Support](#).