


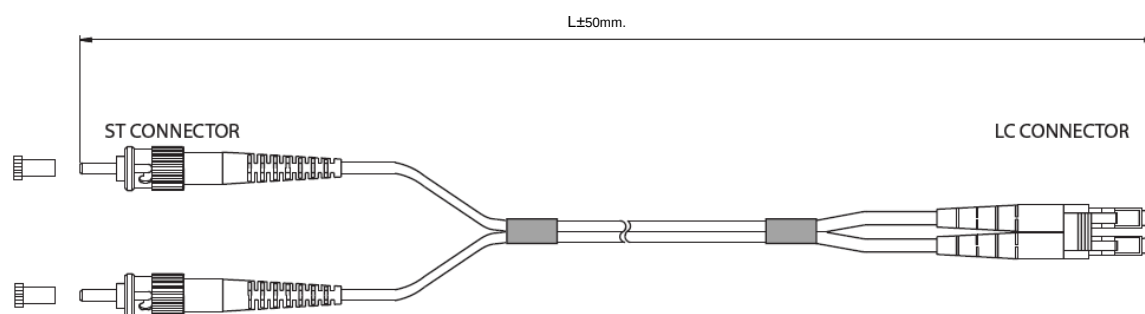

ST to LC FIBER OPTIC PATCH CORD

1. APPLICATION

This specification covers the general requirements for fiber optic patch cord. The cables are high grade duplex cable available FR-LSZH. The patch cords are low insertion loss and high return loss. Good in repeatability and exchangeability. The patch cord shall be factory assembled with high quality control and 100% test. Provide label for easily to identify. The patch cord shall be available length in 3, 5, and 10 meters or other.

LINK fiber optic patch cord support application such as 40/100Gbps Ethernet, IEEE802.3ae, 10G Ethernet, IEEE802.3z, Gigabit Ethernet, Fast Ethernet, Ethernet, 100BASE-F, 52/155/622Mbps and 1.2Gbps ATM, FDDI, Fiber channel and others.

ANSI/TIA-568-C.3

ANSI/TIA/EIA-568-B.3

ANSI/ICEA 696, ANSI/ICEA 596

FOTP EIA/TIA-455

ITU-T G.652D (Singlemode)

ITU-T G.651 (Multimode)

GR 326 CORE (Singlemode)

ISO/IEC 11801:2002

ISO/IEC 11801:2011 (Ed.2.2)

IEC 60793, IEC 60794

IEC 61300-2, IEC 61300-3

TIA/EIA-604, FOCIS 2, FOCIS 10

RoHS Compliant, EN 50173-1

UL, FR-LSZH, OFNR

2. ORDER INFORMATION

ST to LC FIBER OPTIC PATCH CORD, DUPLEX, SIMPLEX, FR-LSZH AND OFNR

Descriptions	Part Number				
	9/125 μ m (OS2)	62.5/125 μ m (OM1)	50/125 μ m (OM2)	50/125 μ m (OM3)	50/125 μ m (OM4)
ST to LC Patch Cord, Duplex, 3.0mm.	UFP942D3 <u>1</u> -XX	UFP642D3 <u>1</u> -XX	UFP542D3 <u>1</u> -XX	UFP442D3 <u>1</u> -XX	UFP342D3 <u>1</u> -XX
ST to LC Patch Cord, Simplex, 3.0mm.	UFP942S3 <u>1</u> -XX	UFP642S3 <u>1</u> -XX	UFP542S3 <u>1</u> -XX	UFP442S3 <u>1</u> -XX	UFP342S3 <u>1</u> -XX
ST to LC Patch Cord, Duplex, 2.0mm.	UFP942D2 <u>1</u> -XX	UFP642D2 <u>1</u> -XX	UFP542D2 <u>1</u> -XX	UFP442D2 <u>1</u> -XX	UFP342D2 <u>1</u> -XX
ST to LC Patch Cord, Simplex, 2.0mm.	UFP942S2 <u>1</u> -XX	UFP642S3 <u>1</u> -XX	UFP542S3 <u>1</u> -XX	UFP442S3 <u>1</u> -XX	UFP342S3 <u>1</u> -XX

Y = Polish Contact, 0 : PC-PC, 1 : UPC-UPC, 2 : APC-APC, 6 : UPC-APC, 8 : APC-UPC
XX = Length, 03 : 3 meters, 05 : 5 meters, or available on request.

3. OPTICAL FIBER

Items		Specifications
Fiber Type		9/125 μm (OS2)
Max. / Typ. Attenuation	1310 nm	$\leq 0.35 / \leq 0.33$ dB/km
	1383 nm	$\leq 0.35 / \leq 0.31$ dB/km
	1550 nm	$\leq 0.21 / \leq 0.19$ dB/km
	1625 nm	$\leq 0.23 / \leq 0.20$ dB/km
Core	Mode Field Diameter	9.2 $\pm$ 0.4 μm @ 1310 nm 10.4 $\pm$ 0.5 μm @ 1550 nm
Cladding Diameter		125 $\pm$ 0.7 μm
Coating Diameter, Primary		242 $\pm$ 5 μm
Coating Diameter, Secondary		250 $\pm$ 5 μm
Cladding Non-circularity		≤ 0.7 %
Core/Cladding Concentricity error		≤ 0.5 μm
Coating/Cladding Concentricity error		≤ 12 μm
Zero Dispersion Wavelength		1300 ~ 1324 nm
Zero Dispersion Slope		≤ 0.092 ps/(nm ² .km)
Cut-off Wavelength	λ_o (Fiber)	1150 ~ 1330 nm
	λ_∞ (Cable)	≤ 1260 nm
Proof Test Stress		100 Kpsi
Chromatic Dispersion	λ ; 1285~1340nm	≤ 3.5 ps/nm.km
	λ = 1550nm	≤ 18 ps/nm.km
	λ = 1625nm	≤ 22 ps/nm.km
Polarization mode dispersion (PMD)		≤ 0.20 ps/ $\sqrt{\text{km}}$
Fiber Curl		≥ 4 M
Numerical Aperture		0.130 $\pm$ 0.010
Group refractive index	1310nm	1.4676
	1550nm	1.4682

Table 1 The Optical, Geometrical Performance of the Singlemode Fiber (The specification conforms to the requirement of ISO/IEC11801, ANSI/TIA-568-C.3, IEC 60793-2B1.3, ITU-T G.652D)

Items		Specifications			
Fiber Type		62.5/125 μm (OM1)	50/125 μm (OM2)	50/125 μm (OM3)	50/125 μm (OM4)
Max./ Typ. Attenuation (dB/km)	850 nm	$\leq 3.0 / \leq 2.7$	$\leq 2.7 / \leq 2.5$	$\leq 2.7 / \leq 2.3$	$\leq 2.7 / \leq 2.3$
	1300 nm	$\leq 0.8 / \leq 0.6$	$\leq 0.8 / \leq 0.7$	$\leq 0.8 / \leq 0.6$	$\leq 0.8 / \leq 0.6$
Bandwidth (MHz/km)	850 nm	≥ 200	≥ 500	≥ 1500	≥ 3500
	1300 nm	≥ 600	≥ 500	≥ 500	≥ 500
850nm Laser Bandwidth (MHz/km)		N.A	N.A	≥ 2000	≥ 4700
Core Diameter (μm)		62.5 $\pm$ 2.5	50.0 $\pm$ 2.5	50.0 $\pm$ 2.5	50.0 $\pm$ 2.5
Cladding Diameter (μm)		125 $\pm$ 1	125 $\pm$ 1	125 $\pm$ 1	125 $\pm$ 1
Core Non-circularity (%)		≤ 5	≤ 5	≤ 5	≤ 5
Cladding Non-circularity (%)		≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0
Core/Cladding Concentricity error (μm)		≤ 1.5	≤ 1.5	≤ 1.5	≤ 1.5
Coating Diameter, Primary (μm)		242 $\pm$ 5	242 $\pm$ 5	242 $\pm$ 5	242 $\pm$ 5
Coating Diameter, Secondary (μm)		250 $\pm$ 5	250 $\pm$ 5	250 $\pm$ 5	250 $\pm$ 5
Coating Non-Circularity (%)		≤ 5	≤ 5	≤ 5	≤ 5
Coating/Cladding Concentricity error (μm)		≤ 12	≤ 12	≤ 12	≤ 12
Proof Test Stress (kpsi)		100	100	100	100
Bending Loss @ 850 & 1300 nm (100 turns, D=75 mm)		≤ 0.5 dB	≤ 0.5 dB	≤ 0.5 dB	≤ 0.5 dB
Zero-Dispersion Wavelength		1332~1354nm	1295~1315nm	1295~1315nm	1295~1315nm
Zero-Dispersion Slope (ps/(nm ² .km))		≤ 0.097	≤ 0.101	≤ 0.101	≤ 0.101
Numerical Aperture		0.275 $\pm$ 0.015	0.200 $\pm$ 0.015	0.200 $\pm$ 0.015	0.200 $\pm$ 0.015
Group refractive index	850nm	1.496	1.482	1.482	1.482
	1300nm	1.491	1.477	1.477	1.477

Table 2 The optical, Geometrical Performance of the Multimode Fiber (The specification conforms to the requirement of ISO/IEC11801, ANSI/TIA-568-C.3, IEC 60793-2A1a, IEC 60793-2A1b, ITU -T G.651)

4. PATCH CORD CONSTRUCTIONS AND MECHANICAL

The construction of the patch cord shall be in accordance with Table 3 below.

Items	Specifications
Ferrule	Zirconia ceramic, Pre-radiused
Boot	Thermoplastic, UL 94-0
ST Housing	Brass with nickel plated
LC Housing	PBT, Thermoplastic, UL 94V-0
Jacket	FR-LSZH and OFNR (UL-1666)
Cable Diameter(Approx.)	3.0 mm.
Cable Diameter(Approx.)	2.0 mm.
Pulling Force	200 N
Minimum Bending Radius	30 mm.

Table 3 Construction and Mechanical of fiber optic patch cord.

5. PERFORMANCE

Items		SINGLEMODE (OS2)	MULTIMODE (OM1, OM2, OM3, OM4)
Insertion Loss	Typ.	≤ 0.15 dB	≤ 0.15 dB
	Max.	≤ 0.30 dB	≤ 0.30 dB
Return Loss	UPC	≥ 50 dB	≥ 20 dB
	APC	≥ 60 dB	-

6. TEMPERATURE RANGE

- Operation Temperature : -40°C to 85°C
- Storage/Shipping Temperature : -40°C to 85°C

- END OF SPECIFICATION -



Specifications subject to change without notice. Revised 10/2017
©Copyright 2006 are Trademark and all rights reserved.