




Gateway Max

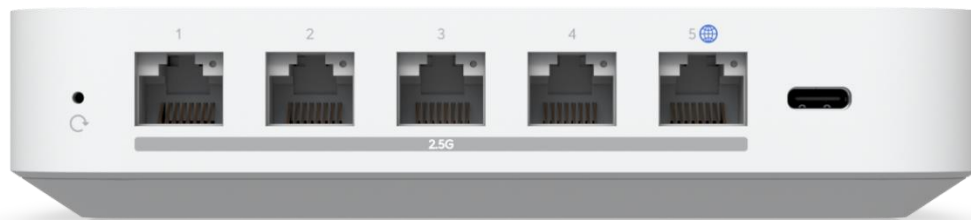

Specifications

Mechanical

Dimensions 141.8 x 127.6 x 30 mm (5.6 x 5 x 1.2")

Weight 520 g (1.1 lb)

Enclosure material Polycarbonate

Resistance IK04

Hardware

Processor Quad-core ARM® Cortex®-A53 at 1.5 GHz

Memory information 2 GB DDR4

Management interface Ethernet
Bluetooth

Networking interface LAN: (4) 2.5 GbE RJ45 ports
WAN: (1) 2.5 GbE RJ45 port

IDS/IPS throughput 1.5 Gbps*
*Measured with iPerf3 on DHCP WAN. Performance may be reduced with PPPoE
depending on ISP implementation.

Power method	USB type C (5V/3A)
Supported voltage range	100–240V
Max. power consumption	9.6W
LED	Ethernet White: link/activity
Button	(1) Factory reset
Ambient operating temperature	-10 to 40° C (14 to 104° F)
Ambient operating humidity	5 to 95% noncondensing
Certifications	CE, FCC, IC

Gateway Features

Performance	WiFi QoS with UniFi APs Application, domain, and country-based QoS Application and device type identification Internet quality and outage reporting
Next-generation security	Application-aware firewall rules Signature-based IPS/IDS threat detection Content, country, domain, and ad filtering VLAN/subnet-based traffic segmentation Full stateful firewall

Advanced networking

License-free SD-WAN*
WireGuard, L2TP and OpenVPN server
OpenVPN client
OpenVPN and IPsec site-to-site VPN
One-click Teleport* and Identity Enterprise VPN**
Policy-based WAN and VPN routing
DHCP relay
Customizable DHCP server
IPv6 ISP support


*When paired with a CloudKey or Official UniFi Hosting.

**When paired with a CloudKey.

Application Requirements

UniFi Network

Version 8.1.113 and later

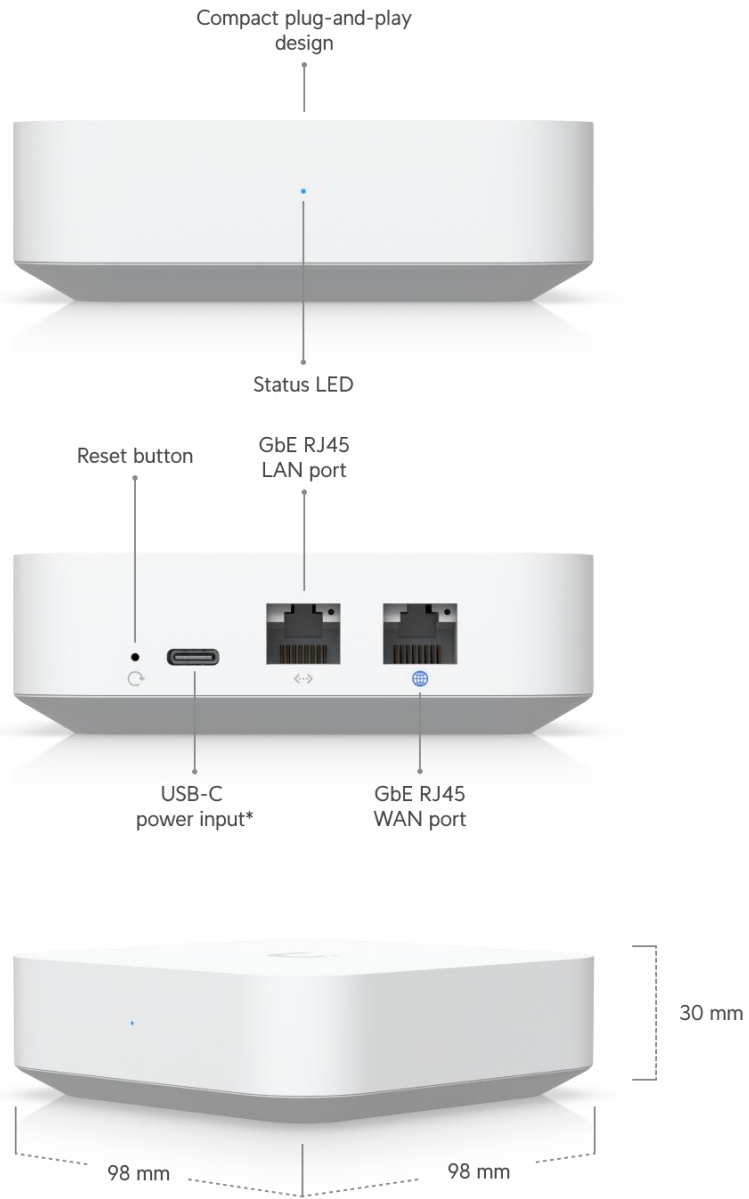

*5V DC, 3A USB-C adapter included.

If you need further assistance, visit our [Help Center](#) or contact [Ubiquiti Support](#).

