


PRO

Operating Instructions

Included Installation Instructions

Dome Cover

Model No. **WV-CS5S**
WV-CS5C

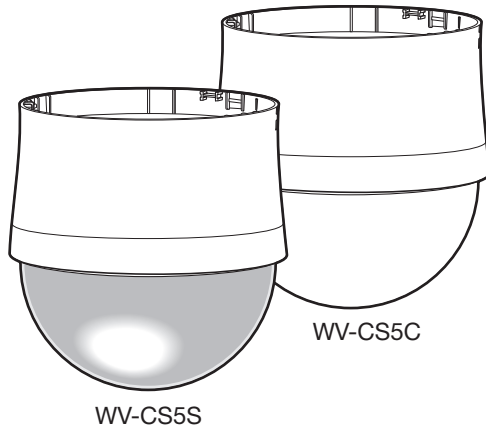

Before attempting to connect or operate this product, please read these instructions carefully and save this manual for future use.

WV-CS5S is a smoke type, WV-CS5C is a clear type.

ENGLISH

DEUTSCH

FRANÇAIS

ESPAÑOL

ITALIANO

РУССКИЙ

Precautions

- Installation work requires technique and experience.
- Failure to observe this may cause injury or damage to the product.
- Be sure to consult the dealer.

Mounting procedures


Read along with the Installation Guide of the camera body.

Step 1

Connect the cables to the camera, and fix them to the ceiling. (Refer to the Installation Guide of the camera in use.)

Step 2

Remove the bottom decorative cover, and attach the dome cover to the top decorative cover.

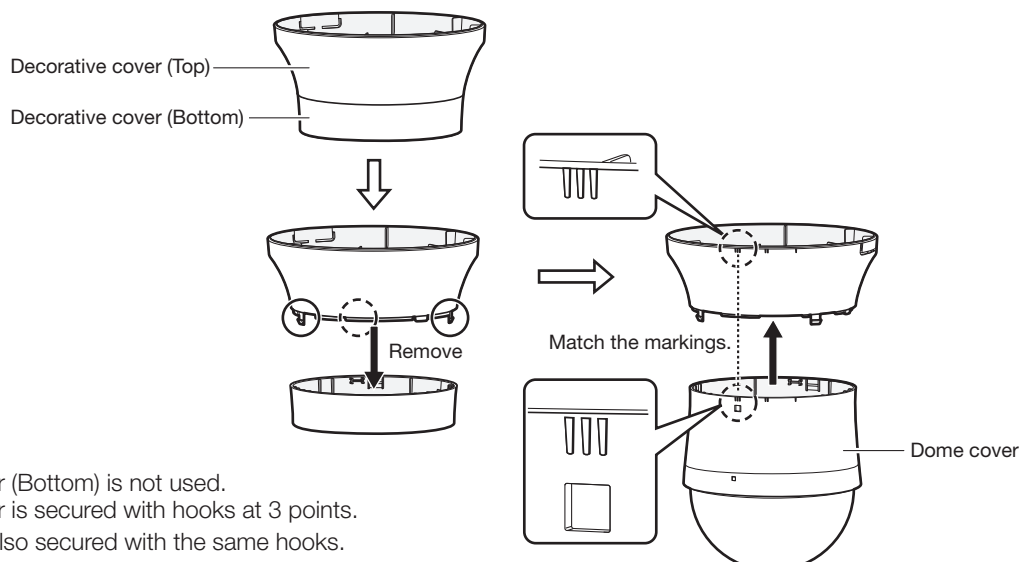

- The decorative cover (Bottom) is not used.
- The decorative cover is secured with hooks at 3 points.
The dome cover is also secured with the same hooks.


Step 3

Remove the protective sheet from the lens surface of the camera.

Step 4

Align the "I" mark of the decorative (Top) and the arrow mark of the camera body, and insert the cover from the bottom. After inserting the decorative cover, rotate it clockwise when looking at it from underneath by 2 steps to engage the cover by pushing it up as shown in the drawing below.

Make sure that the lock lever is securely inserted into the slot of the decorative cover. Then remove the protective sheet from the dome cover.

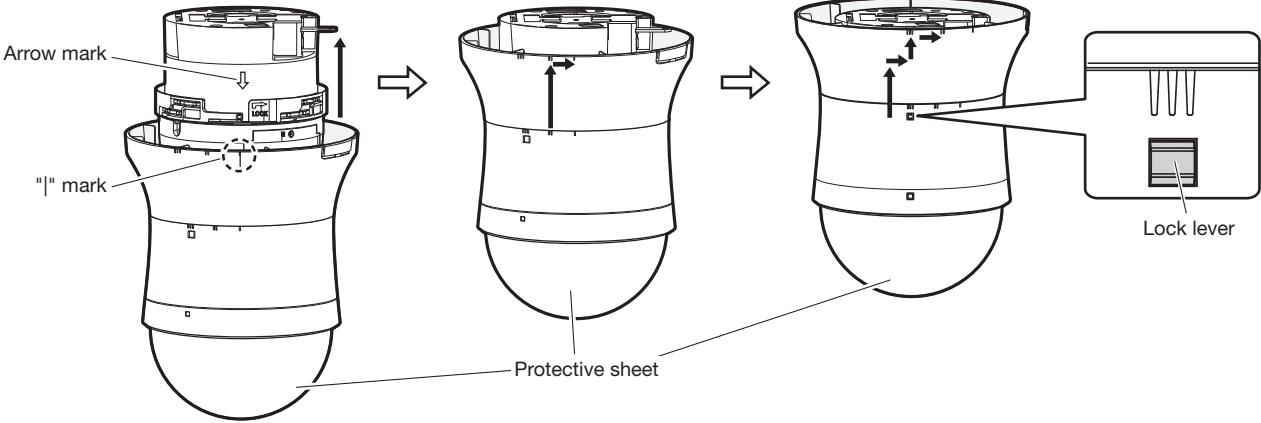

Note:

- To remove the decorative cover from the camera body, rotate the decorative cover counterclockwise when looking at it from underneath and pull it slightly downward while pressing the lock lever.
- The body part of the dome cover may be caught in the view depending on the lens direction and the angle. In such a case, adjust the lens direction.

Specifications

Ambient operating temperature:	-10 °C to +55 °C {14 °F to 131 °F}
Mass:	Approx. 200 g {0.44 lbs}
Dimensions:	ø156 mm x 162 mm (H) {ø6-5/32 inches x 6-3/8 inches (H)}, diameter of the dome: 145 mm {5-23/32 inches}

Standard Accessories

Operating Instructions1 set